


DATE DRAFT CHECK APV'D 04-26-19 V.J.C. J.I. V.J.C. HI6200-WT-10-ANA-000 SINGLE CHANNEL WEIGHT TRANSMITTER






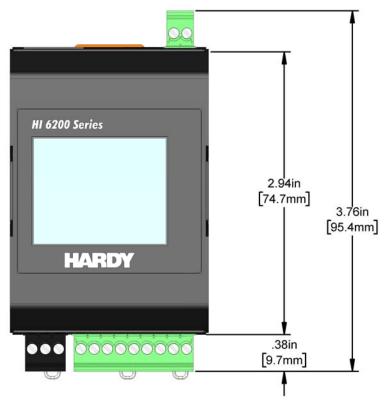

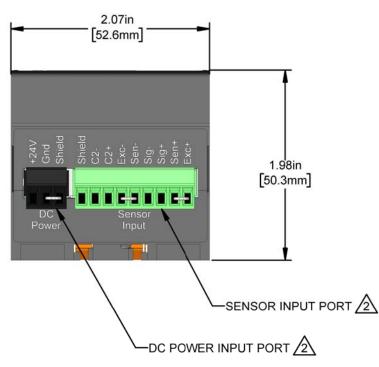

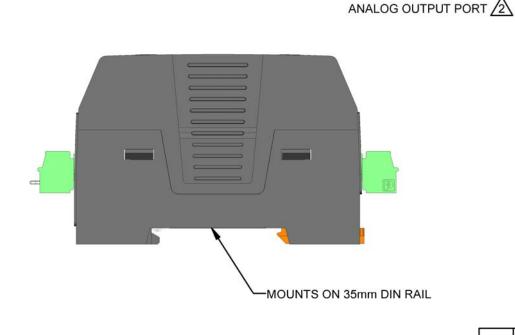



0584-0108 INSTALLATION/INTERCONNECTION DIAGRAM, HI6200-WT-10-ANA-000 SEE NOTES ITEM QTY PART NUMBER DESCRIPTION COMMENTS

-ETHERNET PORT 🔼

Α

SHEET 1 OF 2

3. IF THE HI 6200 INSTRUMENT IS USED IN A MANNER NOT SPECIFIED BY HARDY PROCESS SOLUTIONS, THE PROTECTION PROVIDED BY THE INSTRUMENT MAY BE IMPAIRED. SEE SHEET 2 FOR USER INTERFACE CONNECTIONS.

1. SEE HARDY PROCESS SOLUTIONS WEB SITE FOR ADDITIONAL MOUNTING AND WIRING INFORMATION.

NOTES: UNLESS OTHERWISE SPECIFIED


PROPRIETARY NOTICE
ALL DATA AND INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONFIDENTIAL AND PROPRIETARY INFORMATION OF HARDY PROCESS SOLUTIONS AND ALL RIGHTS THEREIN ARE
EXPRESSLY RESERVED. BY ACCEPTING THIS MATERIAL THE RECIPIENT AGREES THAT THIS MATERIAL AND THE INFORMATION CONTAINED THEREIN IS HELD IN CONFIDENCE AND IN TRUST AND SHALL
NOT BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS, EXCEPT TO MEET THE SPECIFIC PURPOSE FOR WHICH IT WAS DELIVERED.

PARTS LIST UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS: NIA DECIMALS: XX = ±.03 XXX = ±.010 ANGLES ±0°, 30° HARDY APPROVALS DRAWN V. CHULA 12-21-18 CHECKED INSTALLATION/INTERCONNECTION J. IBARRA 04-26-19 DIAGRAM, HI6200-WT-10-ANA-000 MATERIAL APPROVED DATE V. CHULA 04-26-19 FSCM DRAWING NO. ISSUED V. CHULA 04-26-19 D 21316 0584-0108 RODUCTION DO NOT SCALE DRAWING FILE NAME: 584108A1.SLDDRW SCALE: NONE

POWER INPUT TERMINATIONS

NOTES:

- CLASS 2 INPUT VOLTAGE RANGE [24VDC NOMINAL]: 24 VDC, 2.5 WATTS NOMINAL
- TERMINAL BLOCK WIRE SIZE RANGE: 16 AWG MAXIMUM / 28 AWG MINIMUM. WIRE TEMPERATURE RATING TO BE 90 DEGREES C. WIRE TIGHTENING TORQUE: 1.9 LB-IN / 2.2 LB-IN [0.22 Nm / 0.25 Nm].

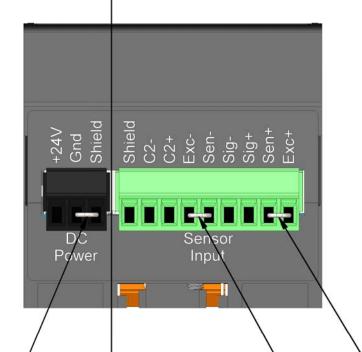

WEIGH SCALE SENSOR INPUT TERMINATIONS

NOTES:

- IF CONDUIT IS USED, DO NOT RUN LOAD CELL CABLE PARALLEL TO, OR IN SAME CONDUIT WITH, POWER WIRING, RELAY CABLE OR OTHER HIGH ENERGY CABLES.
- 2. FACTORY INSTALLED JUMPERS TO REMAIN IN PLACE ONLY FOR FOUR WIRE NON C2 LOAD CELL CONNECTION. JUMPERS TO BE REMOVED FOR SIX WIRE NON C2 OR EIGHT WIRE C2 LOAD CELL CONNECTIONS. EXCITATION AND SENSE WIRES TO BE CONNECTED TOGETHER IN JUNCTION BOX.
- 3. REQUIRED LOAD CELL CABLE FOR C2 SECOND GENERATION CALIBRATION SYSTEM AND INTEGRATED TECHNICIAN: HARDY PROCESS SOLUTIONS P/N 6020-0001-0.
- 4. SEE USER'S GUIDE FOR ADDITIONAL INFORMATION ON LOAD CELL CONNECTIONS. USER'S GUIDE IS LOCATED ON HARDY PROCESS SOLUTIONS WEB SITE.
- TERMINAL BLOCK WIRE SIZE RANGE: 16 AWG MAXIMUM / 28 AWG MINIMUM. WIRE TEMPERATURE RATING TO BE 90 DEGREES C. WIRE TIGHTENING TORQUE: 1.9 LB-IN / 2.2 LB-IN [0.22 Nm / 0.25 Nm].

FACTORY INSTALLED JUMPER BETWEEN "Gnd" AND "Shield"


-FACTORY INSTALLED JUMPER BETWEEN "Sen-" AND "Exc+"

-FACTORY INSTALLED JUMPER BETWEEN "Exc-" AND "Sen-"

4-20mA ANALOG OUTPUT TERMINATIONS

NOTES:

- SEE USER'S GUIDE FOR ADDITIONAL INFORMATION ON ANALOG OUTPUT TERMINATIONS. USER'S GUIDE IS LOCATED ON HARDY PROCESS SOLUTIONS WEB SITE.
- 2. DO NOT BUNDLE ANALOG OUTPUT WIRING WITH POER WIRING, RELAY CABLE OR ANY OTHER HIGH ENERGY CABLES.
- TERMINAL BLOCK WIRE SIZE RANGE: 16 AWG MAXIMUM / 28 AWG MINIMUM. WIRE TEMPERATURE RATING TO BE 90 DEGREES C. WIRE TIGHTENING TORQUE: 1.9 LB-IN / 2.2 LB-IN [0.22 Nm / 0.25 Nm].

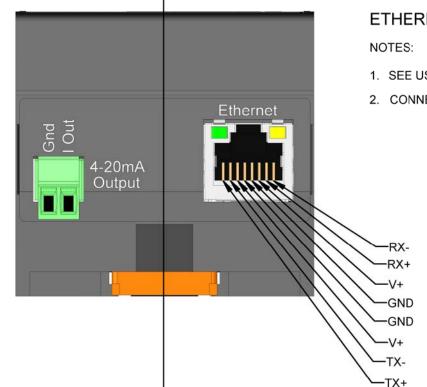


ETHERNET TERMINATION

- 1. SEE USER'S GUIDE FOR ADDITIONAL INFORMATION ON ETHERNET TERMINATIONS.
- 2. CONNECTOR TYPE: RJ-45, 8 PIN.

PROCESS SOLUTIONS

TITLE

INSTALLATION/INTERCONNECTION DIAGRAM, HI6200-WT-10-ANA-000



D 21316 DRAWING NO. 0584-0108

SHEET 2 OF 2

Α

FILE NAME: 584108A1.SLDDRW SCALE: NONE